



1. The standard about measuring items and condition as follow:



1.1 Constant Current :

All of the qualification Ultracapacitors were subjected to Baseline Testing at room temperature (25° C).

The constant current test determines the Capacitance, series Resistance (Rinf), the ratio of Cup to Cdown, and the ratio of Rup to Rinf of the Ultracapacitor. The constant current test consists of the following steps:

- Step 1. Charge the Ultracapacitor to rated voltage 2.5 Volts DC at a constant current of 1.0 Amps.
- Step 2. Float for 15 seconds without charge current.
- Step 3. Discharge the unit to 0.1 VDC at a constant current of 1.0 Amps.
- Step 4. Rest for 15 seconds.

Repeat Step 1 to Step 4 for 3 cycles. Use the data on the third cycle to calculate Capacitance (Cdown), and Equivalent Series Resistance (Rinf).

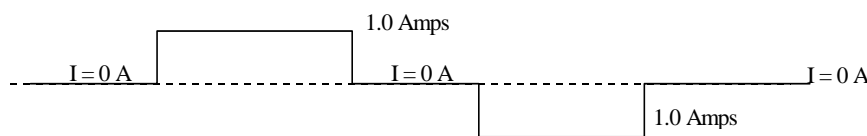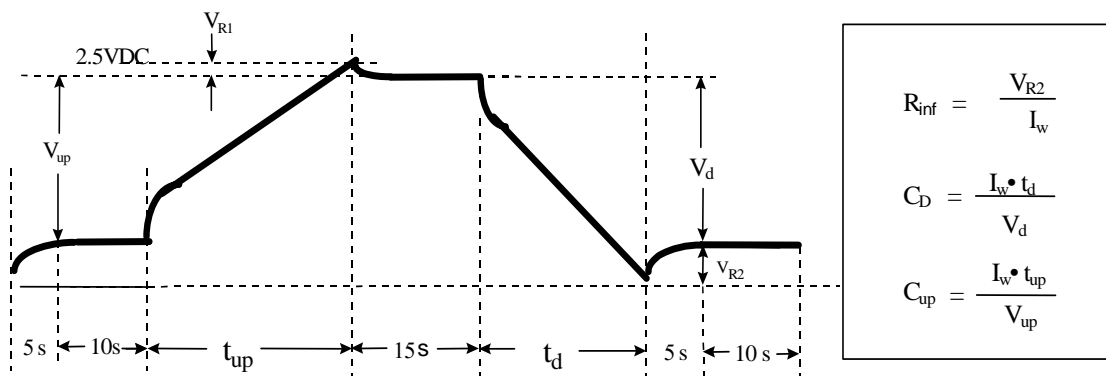

Constant Current Test

1.2 LEAKAGE CURRENT :

Leakage current test procedure:

The ultracapacitor is subject to leakage current testing at room temperature .The cells are charged to 2.5VDC for 12 hours. After 12 hours the Leakage Current measurement shall be below 90 Micro –Amp of current. Cells deemed to be uncharged maybe cycled through this test at a second time to validate performance.



2. When you use electrolytic ultracapacitors, remember the following:

2.1. Circuit Design

Ensure that operational and mounting conditions follow the specified conditions detailed in the catalog and specification sheets.

2.1.1 Lifetime

Ultracapacitor have a longer lifetime than do secondary batteries, but their life is still limited. During use, capacitance decreases and internal resistance rises. The lifetime of a Ultracapacitor is greatly affected by ambient temperature, applied voltage and operating current. By reducing these factors as much as possible, capacitor lifetime can be lengthened.

2.1.2 Voltage

If a Ultracapacitor is used at a voltage exceeding its rated voltage, not only is its lifetime shortened, but depending on the actual voltage, gas generated by electrochemical reactions inside the capacitor may cause it to leak or rupture.

2.1.3 Polarity

Be sure to verify the polarity of the capacitor before use. If a reverse voltage is applied for a long time, capacitor lifetime is shortened and serious damage such as electrolyte leakage may occur. Furthermore, there may be leftover electric charge from capacitor testing that could damage other circuit components such as the low-withstanding voltage parts of semiconductors, etc.

2.1.4 Ambient Temperature

- (1) Capacitor life is affected by operating temperature. In general, lowering ambient temperature by 10 °C will double the life of a capacitor. Use the capacitor at the lowest possible temperature under the maximum guaranteed temperature.
- (2) Operation above the maximum specified temperature not only shortens capacitor life, but can also cause serious damage such as electrolyte leakage. Verify the operating temperature of the capacitor by taking into consideration not only the ambient temperature and temperature inside the unit, but also the radiation from heat generating elements inside the unit (power transistors, IC's, resistors, etc.) and self-heating due to ripple current. Be careful not to place heat-generating elements across from the capacitor on the opposite side of the PCB.

2.1.5 Characteristics of constant current and constant

resistance discharging The time required for the constant current and constant resistance discharging are respectively represented the equation (1) and (2) below: Discharging time (t) of constant current discharge

$$t = C(V_0 - V_1) / I \quad (1)$$

Discharging time (t) of constant resistance discharge

$$t = -CR \ln(V_1 / V_0) \quad (2)$$

t = charging time (s)

V₀ = initial voltage (v)

V₁ = terminal voltage (v)

I = current during back-up (A)

The above equations may not always be accurate, the terminal down voltage must be considered after the start of discharge if load resistance or load current present. Back-up characteristics for IC Also, if the capacitor is used to back-up and IC, the characteristics of the IC must also be considered. It can



therefore be said that if the voltage is low, the current is also low and the actual back-up time will be longer than that calculated. To be certain that if the capacitor selected is of sufficient value to maintain the necessary energy and time, it should be checked and measured under actual operating conditions.

2.1.6 Voltage Drop During Backup Operation

Take careful notice of the voltage drop caused by the instantaneous operating current and the internal resistance of the Ultracapacitor during the switch from power-failure-detection to backup mode. Because internal resistance varies by product, use the following table to decide the correct operating (discharge) current.

t = charging time (s)

V_0 = initial voltage (v)

V_1 = terminal voltage (v)

I = current during back-up (A)

2.1.7 Ripple Current

Ultracapacitor have a higher internal resistance than do electrolytic capacitors and are more susceptible to internal heat generation when exposed to ripple current. When the temperature of the element rises, a reaction current flows inside the Ultracapacitor, generating reaction products and raising internal resistance even further. This makes it difficult to maintain capacitance. Set the allowable limit for the ripple current-induced rise in capacitor temperature to 3 $^{\circ}\text{C}$ measured at the surface of the capacitor.

2.1.8 Connecting Capacitors in Series

Taking into consideration the possibility of an imbalance in the voltages across the capacitors, make sure that the voltage applied to each capacitor will not exceed the Maximum operating voltage. If the voltage balance breaks down, an over voltage condition could result. To prevent this from occurring, add a voltage dividing resistor in parallel with each capacitor, allowing for the capacitor's leakage current.

Always consider safety when designing equipment and circuits. Plan for worst case failure modes such as short circuits and open circuits which could occur during use.

- (1) Provide protection circuits and protection devices to allow safe failure modes.
- (2) Design redundant or secondary circuits where possible to assure continued operation in case of main circuit failure.

2.2. Mounting Considerations

2.2.1 Heat Stress During Soldering

Excessive heat stress may result in the deterioration of the electrical characteristics of the capacitor, loss of air-tightness, and electrolyte leakage due to the rise in internal pressure.

- (1) If the tip of the soldering iron touches the capacitor's external sleeve, the sleeve will melt or break
- (2) Use the general reference chart below to set soldering temperature and time.
- (3) When soldering with a soldering iron, do not touch the tip to the body of the capacitor. Minimize the time that the soldering iron is in contact with the capacitor terminals.
- (4) When using equipment such as a UV curing oven for pre-heating and adhesive hardening, set the temperature of the capacitor's surface 100 $^{\circ}\text{C}$ or under and the time less than 60 seconds.(maximum temperature less than 105 $^{\circ}\text{C}$)
- (5) Never perform reflow soldering on ultracapacitor using infrared heating or atmospheric heating methods.



2.2.2 Circuit Board Patterns Under the Capacitor

Avoid circuit board runs under the capacitor as electrolyte leakage could cause an electrical short.

2.2.3 Elevate the Ultracapacitor Above the PCB For Mounting

If the capacitor is soldered directly to a double-sided PCB, a short circuit may occur between the capacitor body and the wiring pattern. In the case of a through hole board, flux or solder blowing out of the holes can shrink or break the external sleeve and possibly cause internal damage to the capacitor.

2.2.4 Circuit Board Cleaning

Circuit boards can be immersed or ultrasonically cleaned using suitable cleaning solvents for up to 5 minutes and up to 60 °C maximum temperatures. The boards should be thoroughly rinsed and dried. [Recommended cleaning solvent include] Pine Alpha ST-100S, Sunelec B-12, DK be clear CW-5790, Aqua Cleaner 210SEP, Cold Cleaner P3-375, Telpen Cleaner EC-7R, Clean-thru 750H, Clean-thru 750L, Clean-thru 710M, Techno Cleaner 219, Techno Care FRW-17, Techno Care FRW-1, Techno Care FRV-1, IPA (isopropyl alcohol)] Consult with us if you are using a solvent other than any of those listed above.] The use of ozone depleting cleaning agents are not recommended in the interest of protecting the environment.

2.3. Precautions for using capacitors

Do not use or store the unit containing the capacitor in any of the following environments.

- (1) Environment where the capacitor is subject to direct contact with water, salt water or oil.
- (2) Environment where capacitors are exposed to direct sunlight.
- (3) High temperature, humid environment where water vapor is condensing on the capacitor surface.
- (4) Environment where the capacitor is in contact with chemically active gases.
- (5) Acid or alkaline environment.
- (6) Environment subject to excessive vibration and shock.

2.4. Emergency Procedures

If the capacitor overheats or starts to smell, immediately switch off the unit's main power supply to stop operation. Keep your face and hands away from the capacitor, since the temperature may be high enough to cause the capacitor to ignite and burn.

2.5. Long Term Storage

Do not store capacitors under any of the environmental conditions listed below:

- (1) At high temperature and high humidity.
- (2) Where the capacitor is subject to direct contact with water, salt water or oil.
- (3) Where the capacitor is exposed to direct sunlight or to toxic gases.
- (4) Where there is a lot of dust in the air.

2.6. Capacitor Disposal

When disposing of capacitors, follow the instructions below:

- (1) Crush or make a hole in the capacitor before burning. If the capacitor is burned "as is," it can explode. If taking apart the capacitor before disposal, wear protective gear such as gloves and goggles.
- (2) Because of the capacitor's plastic (polyvinyl chloride) sleeve, burn at high temperature. Low temperature burning will result in the production of toxic gases such as chlorine.
- (3) If you choose not to burn used capacitors, consign them to a specialized industrial waste processor for disposal.

The application guidelines above are taken from : Technical Report EIAJ RCR-2370 issued by the Japan Electronic Industry Association, Inc. Guideline of notabilia for fixed electric double layer capacitors with non-solid electrolyte for use in electronic equipment. Refer to this Technical Report for additional details.



3. Precautions for Your Safety

YEC (Yeong long technologies) capacitors (Ultracapacitor) contain flammable organic solvents. For your safety, please follow following prohibitions.

3.1 Warning !

- **Do not charge by high current or high voltage.**
Doing so may generate gas inside the capacitor, resulting swelling, catching fire, heat generation or bursting.
- **Do not reverse placement of (+) and (-)**
YEC capacitors have polarity. If the (+) and (-) side of the capacitor is reverse inserted, it may cause a short-circuiting or over discharge of the capacitor on some equipment and it may induce overheating, explosion or fire.
- **Do not solder directly to the capacitor**
If soldering is performed directly to the capacitor, the capacitor is heated up, consequently cause leakage, explosion or fire due to overheating from internal short-circuiting.
- **Keep capacitors out of children's reach.**
If leaked liquid is ingested or a capacitor is swallowed, consult a physician immediately.
- **Do not heat, disassemble nor dispose of in fire**
Doing so damages the insulation materials and may cause catching fire, heat generation, leakage or bursting.
- **Do not discharge by force**
If the capacitor is discharged by direct connection to an external power supply etc., voltage of the capacitor will decline lower than 0 volts (electrical reversal) and will cause the capacitor case to expand, overheat, leak, explode or burn.
- In case of leakage or a strange-smell, keep away from fire to prevent ignition of any leaked electrolyte.

3.2 CAUTION !

- **If leaked liquid gets in the eyes, wash them with clean water and consult a physician immediately.**
- **Do not use nor leave the capacitors in direct sunlight nor in high-temperature areas.**
It may cause catching fire, heat generation, leakage or bursting.
- **Do not use new and used capacitors together. Do not use different types of capacitors together.**
It may cause catching fire, heat generation, leakage or bursting.
- **If you connect two or more capacitors in series or parallel, please consult us in advance.**
It may cause bursting or catching fire due unbalanced load or voltage.
- **Keep capacitors away from direct sunlight, high temperature and humidity.**
It may cause heat generation or performance deterioration.